



# 3-CHANNEL GENERAL PURPOSE

System features Dog Bone Connectors

## FEATURES


- Protects cables and hoses up to 2.25" outside dia.
- Dog Bone Connectors to extend to any desired length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Modular interlocking design for easy setup



"Dog Bone" Connector

MODEL: GD3X225

GUARD DOG® 3-CHANNEL CABLE PROTECTOR with hinged lid protects valuable electrical cables and hose lines from damage while providing a safe crossing for vehicle and pedestrian traffic. Modular interlocking design is ideal for use in amusement parks, entertainment venues, sporting events, and most public, commercial, industrial, construction, and utility applications.

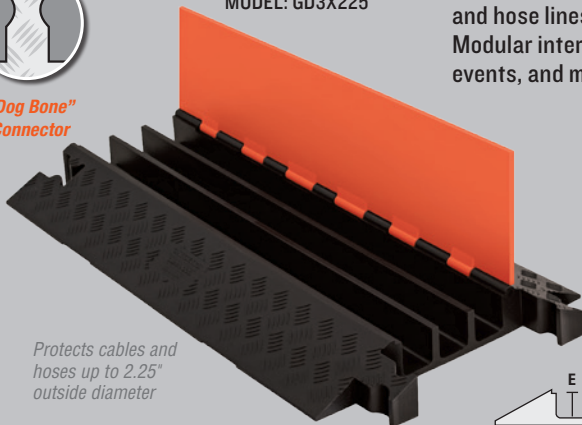

Protects cables and hoses up to 2.25" outside diameter

Lid/Base Color Options - Specify after model number



Orange/Black = O/B






Black/Black = B/B

### LOAD CAPACITY

Max load tested at 70°F (21°C)

14,210 lb./Tire (6,446 kg)  
28,420 lb./Axle (12,892 kg)




MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
GD3X225	36 in. (91.4 cm)	20 in. (51.0 cm)	3 in. (7.65 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	30 lb. (13.6 kg)

## ACCESSIBILITY RAMPS for Guard Dog 3-Channel General Purpose Cable Protectors

CHECKERS 3-CHANNEL ACCESSIBILITY RAMPS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA Compliant

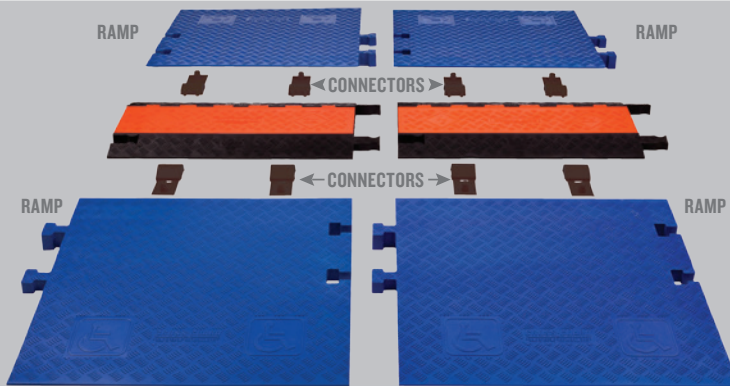

System shown with 2 General Purpose Guard Dogs, 2 pairs of ramps, 8 connectors.

- Patented, modular ADA/DDA Compliant ramps
- Still allows access to cables and cords
- Add ramps when requirements specify
- One person installation - no tools required


### LOAD CAPACITY

Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)  
40,300 lb./Axle (18,280 kg)

U.S. Patent No: 6,481,036

### RAMPS - CPRP-GD3

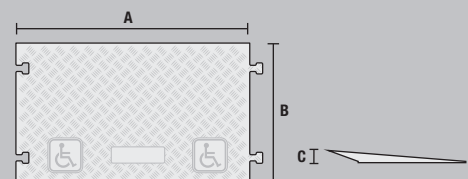

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
CPRP-GD3	36 in. (91.4 cm)	34.81 in. (88.42 cm)	2.88 in. (7.32 cm)	66 lb. (30 kg) (PAIR OF RAMPS)	Blue