

EXTREME CROSSOVER SYSTEMS

For heavy duty mining and construction sites

FEATURES

- Protects cables & hoses in mining and construction
- Made from durable urethane that withstands over a million pounds gross vehicle weight
- Impact and abrasion resistant to trucks and falling rock
- Eliminates cost of trenching or rerouting cables
- Protects cables and hoses up to 5.5" outside dia.

CHECKERS® EXTREME CROSSOVER PADS provide protection for electrical cables used in mining and construction. Durable urethane construction withstands thousands of pounds of weight and endures constant pounding, impact and abrasion caused by haul trucks and falling rocks. Extensively tested and proven to be oil, chemical, abrasion, cut/tear and temperature resistant. Types 3 and 4 feature molded-in through-holes for tow chain attachment (chain not included). Type 5 includes heavy duty chain handle on each side. Crossover sections can be fastened together for any length required. The use of crossover pads greatly improves safety and eliminates the cost and labor of burying, rerouting, or stringing cables overhead.

Custom lengths available up to 38'.


TYPE 1 and 2: Feature molded-in hand holds for ease of placement.

TYPE 3 and 4: Feature two molded-through 1-inch holes for fastening together multiple pad sections using wire rope. Closure strips **MUST BE ORDERED SEPARATELY**.


TYPE 5: Feature steel framework throughout and molded-in chains at both ends for moving. Closure strip **INCLUDED**.

NOTE: Please make your product selection carefully. Extreme Crossover Systems are non-returnable.

End Views



240-ton haul truck drives over an Extreme Crossover Pad

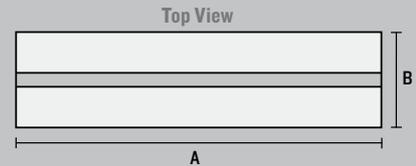

MODEL	DESCRIPTION	A: LENGTH	B: WIDTH	C: HEIGHT	D: STEP HEIGHT	E: SLOT SIZE	COLOR	WEIGHT
X0118-2	Type 1	24 in. (61.0 cm)	18 in. (45.7 cm)	4.5 in. (11.4 cm)	1 in. (2.5 cm)	2.5 in. (6.4 cm)	Orange	37 lb. (16.8 kg)
X0218-2	Type 2	24 in. (61.0 cm)	18 in. (45.7 cm)	4.5 in. (11.4 cm)	1 in. (2.5 cm)	3.0 in. (7.6 cm)	Orange	37 lb. (16.8 kg)
X0342-10	Type 3	120 in. (304.8 cm)	42 in. (106.7 cm)	7 in. (17.8 cm)	.75 in. (1.9 cm)	3.5 in. (8.9 cm)	Orange	852 lb. (386.5 kg)
X0342-CS-10	Closure Strip	120 in. (304.8 cm)	3.43 in. (8.7 cm)	3.3 in. (8.4 cm)	N/A	N/A	Orange	50 lb. (22.7 kg)
X0436-8	Type 4	96 in. (243.8 cm)	36 in. (91.4 cm)	5 in. (12.7 cm)	.75 in. (1.9 cm)	3.25 in. (8.3 cm)	Orange	415 lb. (188.2 kg)
X0436-CS-8	Closure Strip	96 in. (243.8 cm)	3.25 in. (8.3 cm)	3.375 in. (8.6 cm)	N/A	N/A	Orange	44 lb. (20 kg)
X0436-10	Type 4	120 in. (304.8 cm)	36 in. (91.4 cm)	5 in. (12.7 cm)	.75 in. (1.9 cm)	3.25 in. (8.3 cm)	Orange	518 lb. (235 kg)
X0436-CS-10	Closure Strip	120 in. (304.8 cm)	3.25 in. (8.3 cm)	3.375 in. (8.6 cm)	N/A	N/A	Orange	55 lb. (25 kg)
X0442-8	Type 4	96 in. (243.8 cm)	42 in. (106.7 cm)	7 in. (17.8 cm)	.75 in. (1.9 cm)	4.5 in. (11.4 cm)	Orange	610 lb. (277 kg)
X0442-CS-8	Closure Strip	96 in. (243.8 cm)	4.5 in. (11.4 cm)	5.375 in. (13.7 cm)	N/A	N/A	Orange	84 lb. (38.2 kg)
X0442-10	Type 4	120 in. (304.8 cm)	42 in. (106.7 cm)	7 in. (17.8 cm)	.75 in. (1.9 cm)	4.5 in. (11.4 cm)	Orange	762 lb. (346 kg)
X0442-CS-10	Closure Strip	120 in. (304.8 cm)	4.5 in. (11.4 cm)	5.375 in. (13.7 cm)	N/A	N/A	Orange	105 lb. (47.6 kg)
X042-3-L10-B	Type 5	120 in. (304.8 cm)	41.25 in. (104.8 cm)	5.75 in. (14.6 cm)	1.25 in. (3.2 cm)	3.5 in. (8.9 cm)	Orange or Black	2,800 lb. (1270 kg)
X042-3-L20-B	Type 5	240 in. (609.6 cm)	41.25 in. (104.8 cm)	5.75 in. (14.6 cm)	1.25 in. (3.2 cm)	3.5 in. (8.9 cm)	Orange or Black	4,400 lb. (1996 kg)
X042-3-L38-B	Type 5	456 in. (1158.2 cm)	41.25 in. (104.8 cm)	5.75 in. (14.6 cm)	1.25 in. (3.2 cm)	3.5 in. (8.9 cm)	Orange or Black	7,350 lb. (3334 kg)
X042-4-L10-B	Type 5	120 in. (304.8 cm)	41.25 in. (104.8 cm)	6.75 in. (17.1 cm)	2.3 in. (5.9 cm)	4.5 in. (11.4 cm)	Orange or Black	3,150 lb. (1429 kg)
X042-4-L20-B	Type 5	240 in. (604.6 cm)	41.25 in. (104.8 cm)	6.75 in. (17.1 cm)	2.3 in. (5.9 cm)	4.5 in. (11.4 cm)	Orange or Black	5,150 lb. (2336 kg)
X042-4-L38-B	Type 5	456 in. (1158.2 cm)	41.25 in. (104.8 cm)	6.75 in. (17.1 cm)	2.3 in. (5.9 cm)	4.5 in. (11.4 cm)	Orange or Black	8,750 lb. (3969 kg)
X042-5-L10-B	Type 5	120 in. (304.8 cm)	41.25 in. (104.8 cm)	7.75 in. (19.7 cm)	3.25 in. (8.3 cm)	5.5 in. (14.0 cm)	Orange or Black	3,500 lb. (1588 kg)
X042-5-L20-B	Type 5	240 in. (609.6 cm)	41.25 in. (104.8 cm)	7.75 in. (19.7 cm)	3.25 in. (8.3 cm)	5.5 in. (14.0 cm)	Orange or Black	5,850 lb. (2654 kg)
X042-5-L38-B	Type 5	456 in. (1158.2 cm)	41.25 in. (104.8 cm)	7.75 in. (19.7 cm)	3.25 in. (8.3 cm)	5.5 in. (14.0 cm)	Orange or Black	10,050 lb. (4559 kg)

WARNING: Crossover pads are for rubber-tired vehicles only and are not for equipment with metal tracks.